


accent


CEILING AND WALLS

A DIVISION OF ADAMS CAMPBELL COMPANY
ISO 9001: 2000 CERTIFIED


DIRECT MOUNT FLAT METAL CEILING SYSTEM (AC-520)

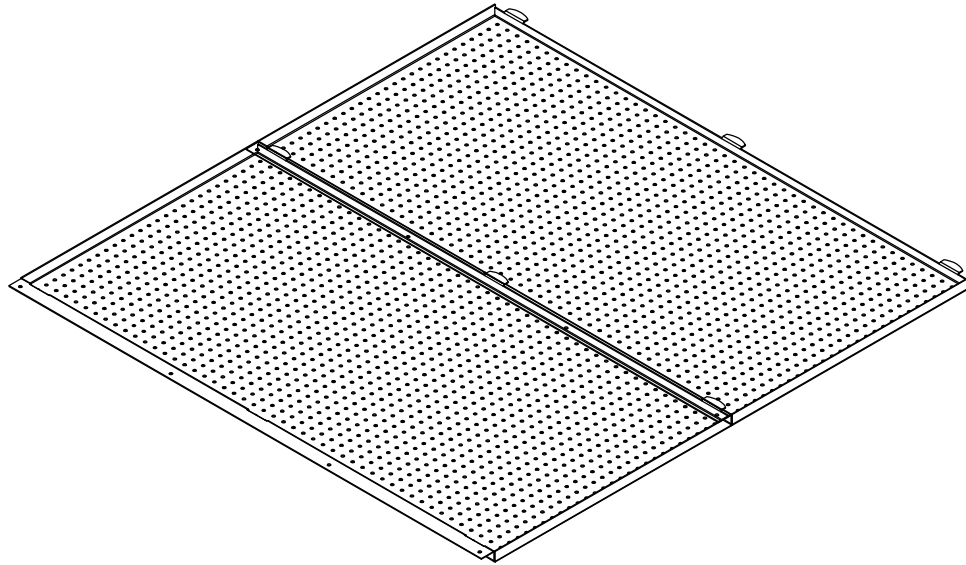


- Description:** Economical direct mount ceiling system, Flat panel, Progressive mount, Perforated or Non-Perforated.
One panel leg is formed with horizontal mounting tab. Panel is screwed to structure. Next panel is inserted into slots into side of panel and opposite leg is screwed in place. Efficient and quick installation.
- Application:** Ceiling provided for interior flat installation.
- Material:** Panel available in aluminum, steel or stainless steel
- Finishes:** Painted powder coat colors, brushed, bright, anodized, vinyl or custom finishes
Reference Options tab for available finishes.
- Standard Sizes:** 24" X 24", 24" X 48", 30" X 30" and 36" X 36".
Custom sizes and shapes are available.
- Fire Rating:** Class A
- Acoustics:** NCR rating of .70 to .100 can be achieved by selecting correct perforation pattern and acoustical backing.
- Perforation:** Reference Options Tab for Patterns, consult manufacturer for acoustical values
- Recycled content:** Aluminum 60% · Steel 33% · Stainless Steel 69%

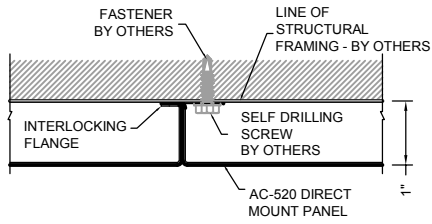


1 PANEL JOINT DETAIL
AC-520-PJ1

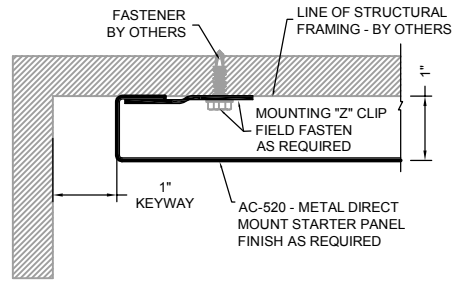


2 PERIMETER DETAIL
AC-520-P1

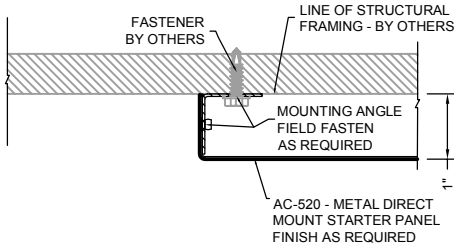

3 PERIMETER DETAIL
AC-520-P2

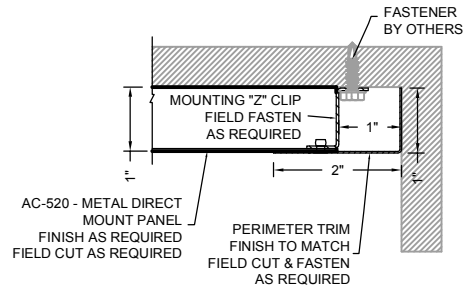

4 PERIMETER DETAIL
AC-520-PFC1

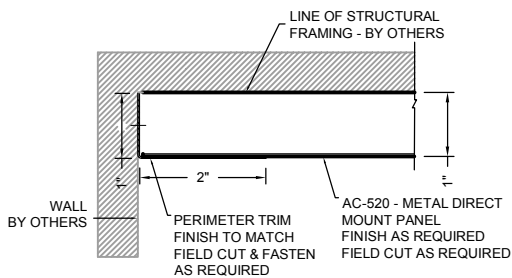

5 PERIMETER DETAIL
AC-520-PFC2